



Weyn-Lauwers N.V.


Industriepark-Noord 12
B - 9100 SINT-NIKLAAS

Tel. : 00 32 (0)3 776.34.13
Fax : 00 32 (0)3 778.09.52
weynlauwers@weynlauwers.be
www.weynlauwers.be

SIGHT GLASS
SS 316 - bsp
fig 865

DESIGN FEATURES

- double sight 1/2"-2" PN10
- threaded BSP
- min. temp : -10°C
- max. temp : +90°C
- specifications : double tempered glass with ABS rotor

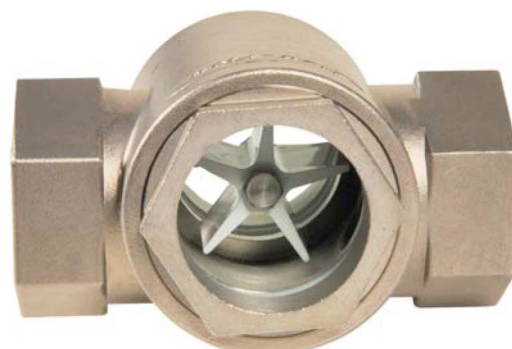




USE

- for common fluids
- max. pressure : 10 bar

MATERIALS

item	Part name	Material
1	body	SS 316 (1.4408)
2	packing	PTFE
3	rotor	ABS
4	glasses	tempered glass

head losses diagram

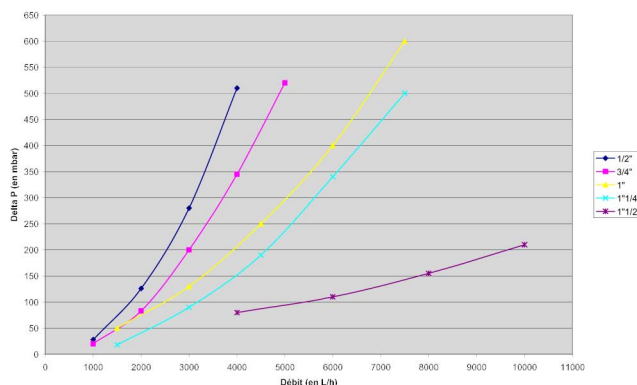

SIZE (in mm)

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
R	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
C	100	100	109	109	150	150
D	80	80	96	96	110	110
d	40	40	40	40	57	57
ref.	865.04	865.05	865.06	865.07	865.08	865.09