

Weyn-Lauwers N.V.

INDUSTRIEPARK-NOORD 12
B - 9100 SINT-NIKLAAS

TEL. 0032 (0)3 776.34.13
FAX. 0032 (0)3 778.09.52

weynlauwers@weynlauwers.be
www.weynlauwers.be


PNEUMATEN
OMAL

TYPE DA DUBBELWERKEND



TYPE SR ENKELWERKEND










Weyn-Lauwers N.V.

INDUSTRIEPARK-NOORD 12
B - 9100 SINT-NIKLAAS

TEL. 0032 (0)3 776.34.13
FAX. 0032 (0)3 778.09.52

weynlauwers@weynlauwers.be
www.weynlauwers.be

PNEUMATEN OMAL DA AFMETINGEN

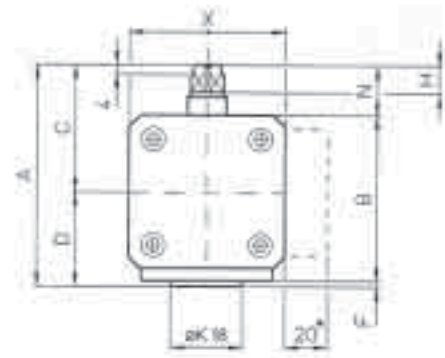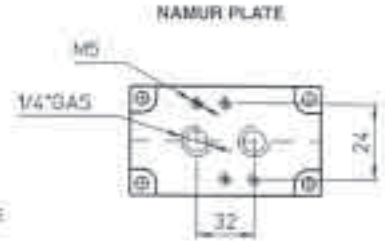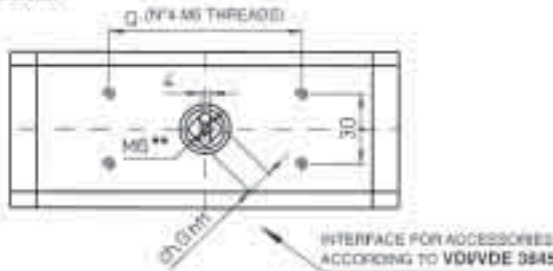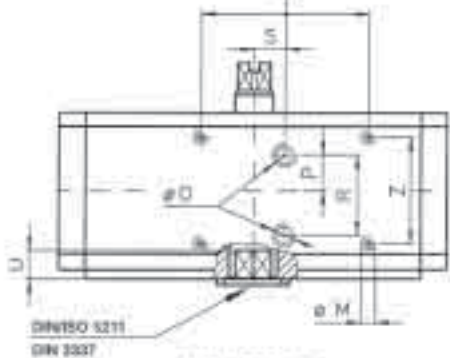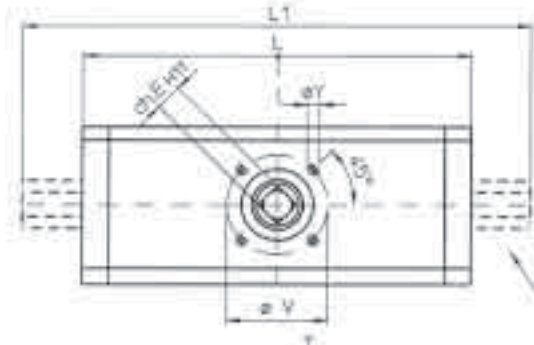

* SIZES FROM DA 15 TO DA 480 CAN BE PROVIDED WITH NAMUR PLATE, ON REQUEST. FOR DA 960 AND DA1920 SIZES, BODIES ARE ALWAYS PROVIDED WITH NAMUR INTERFACE.

** DA 8 HAS M4 THREADS.

TYPE	DA8	DA15	DA30	DA45	DA60	DA90	DA120	DA180	DA240	DA360	DA480	DA960	DA1920
F-VLAK diam. V	F03 36	F03 36	F03 36	F04 42	F04 42	F05 50	F05 50	F07 70	F07 70	F10 102	F10 102	F12 125	F14 140
L	70	114	140	144	162	169	192	212	255	264	295	384	468
L1	-	160	186	210	228	235	258	299	341	350	381	466	581
A	59,7	74,4	82	88	92	101	119	129	139	151	163	186	231
B	42,7	52	60	65,7	70	77,5	86	96	106	118	130	153	198
X	43,2	48	55	60	65	72	80	90	100	112	124	145	180
C	35	44,2	47,5	50	52,5	56	70	75	80	86	92	100	121
D	24,7	30,2	34,5	37,7	39,5	44,5	49	54	59	65	71	86	110
E	9	9	9	11	11	14	14	17	17	22	22	27	36
U	9,5	10,2	10,2	13,2	12,2	16,3	16,3	19,3	19,3	24,3	24,3	29,5	38,5
G	8	8	9	11	11	14	14	17	17	22	22	27	36
H	8	8	11	12,4	13	13	16	16	19	22,7	24	24	24
N	15	20	20	20	20	20	30	30	30	30	30	30	30
diam. Mx diepte	-	M5x10	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x8	M5x8
diam. O	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"
P	11,5	9	12	12,5	17,9	17,9	21	21	26	25	32	NAMUR	NAMUR
Q	30	80	80	80	80	80	80	80	80	80	80	80	80
R	23	20,5	25	25	20,5	20,5	25	25	25	25	25	NAMUR	NAMUR
S	5	6	10	0	0	0	0	0	0	0	0	0	0
T	-	70	70	70	70	70	70	70	70	70	70	NAMUR	NAMUR
diam. K/F	25/2	25/2	25/2	30/2	30/2	35/3	35/3	55/3	55/3	70/3	70/3	85/3	100/3
diam. Yx diepte	M5x8	M5x9	M5x9	M5x9	M5x9	M6x11	M6x11	M8x15	M8x15	M10x17	M10x17	M12x21	M16x25
Z	-	30	36	36	36	36	36	36	36	36	36	NAMUR	NAMUR
luchtverbruik L/cyclus kg	0,016	0,06	0,12	0,18	0,25	0,36	0,5	0,72	1	1,45	2	4	8
	0,29	0,73	1	1,25	1,56	1,85	2,8	3,4	5,9	7,2	9,95	14	25,4

Bestelnr.






Weyn-Lauwers N.V.

INDUSTRIEPARK-NOORD 12
B - 9100 SINT-NIKLAAS

TEL. 0032 (0)3 776.34.13
FAX. 0032 (0)3 778.09.52

weynlauwers@weynlauwers.be
www.weynlauwers.be

PNEUMATEN OMAL SR AFMETINGEN

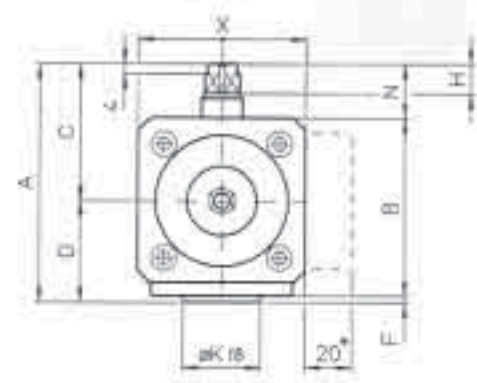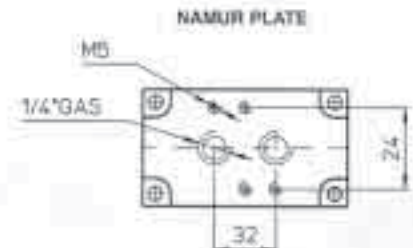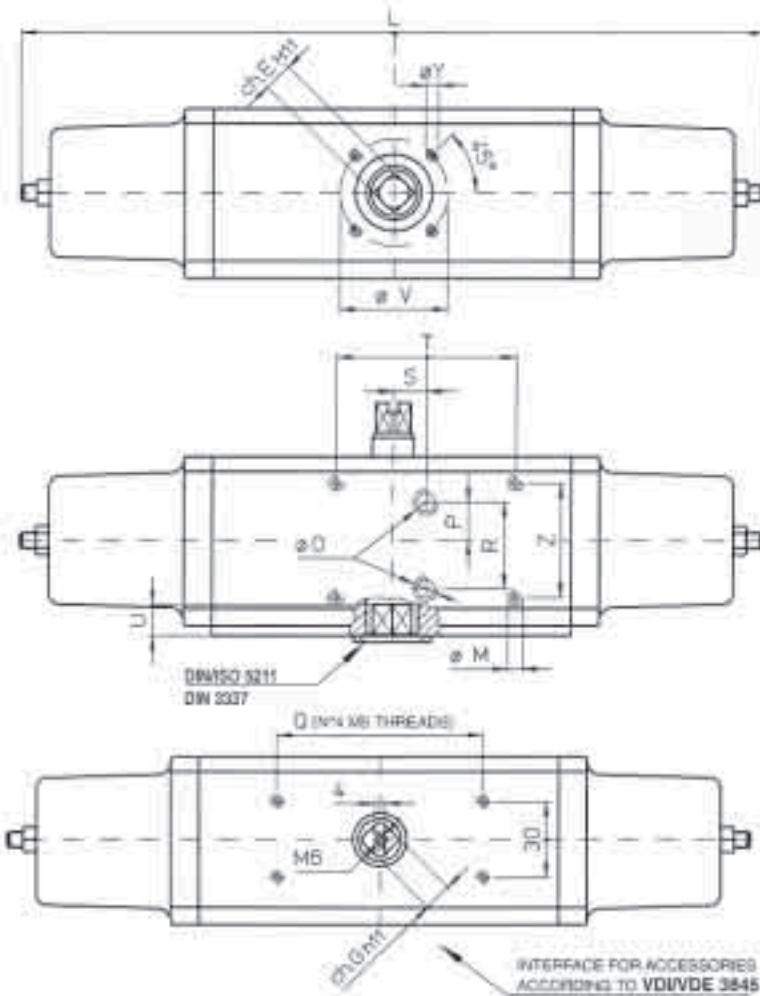

* SIZES FROM SR 15 TO SR 240 CAN BE PROVIDED WITH NAMUR PLATE. ON REQUEST FOR SR 400 AND SR 900 SIZES, BODIES ARE ALWAYS PROVIDED WITH NAMUR INTERFACE.

TYPE	SR15	SR30	SR45	SR60	SR90	SR120	SR180	SR240	SR480	SR960
F-VLAK diam. V	F03 36	F04 42	F05 50	F05 50	F07 70	F07 70	F10 102	F10 102	F12 125	F14 140
L	244	269	298	334	357	395	446	487	609	806
A	82	92	101	119	129	139	151	163	186	231
B	60	70	77,5	86	96	106	118	130	153	198
X	55	65	72	80	90	100	112	124	145	180
C	47,5	52,5	46	70	75	80	86	92	100	121
D	34,5	39,5	44,5	49	54	59	65	71	86	110
E	9	11	14	14	17	17	22	22	27	36
U	10,2	12,2	16,3	16,3	19,3	19,3	24,3	24,3	29,5	38,5
G	9	11	14	14	17	17	22	22	27	36
H	11	13	13	16	16	19	22,7	24	24	24
N	20	20	20	30	30	30	30	30	30	30
diam. Mx diepte	M5x10	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x6	M5x8	M5x8
diam. O	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"
P	12	17,9	17,9	21	21	26	25	32	NAMUR	NAMUR
Q	80	80	80	80	80	80	80	80	80	80
R	25	20,5	20,5	25	25	25	25	25	NAMUR	NAMUR
S	6	10	0	0	0	0	0	0	0	0
T	70	70	70	70	70	70	70	70	NAMUR	NAMUR
diam. K/F	25/2	30/2	35/3	35/3	55/3	55/3	70/3	70/3	85/3	100/3
diam. Yx diepte	M5x9	M5x9	M6x11	M6x11	M8x15	M8x15	M10x17	M10x17	M12x21	M16x25
Z	36	36	36	36	36	36	36	36	NAMUR	NAMUR
luchtverbruik L/cyclus	0,06	0,12	0,18	0,25	0,36	0,5	0,72	1	2	4
kg	1,3	2	2,4	3,5	4,6	7	9,4	12,8	19,2	34,4

Bestelnr.